




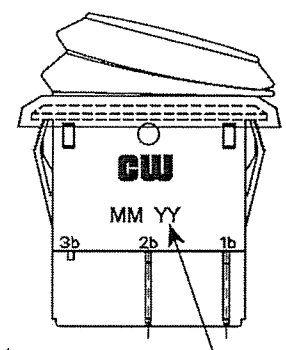
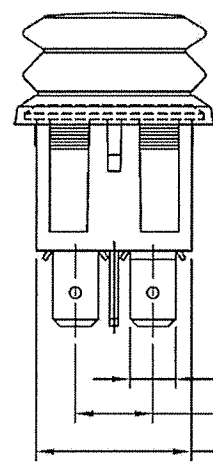
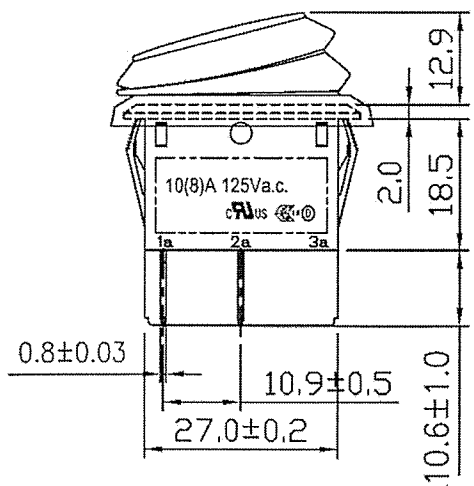
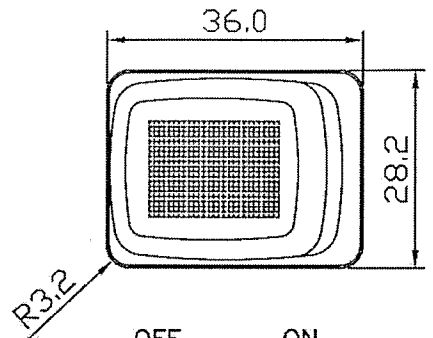


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

<b>Rating</b>	10(8)A 125Va.c. 	<b>Mounting Hole</b>	<b>Circuit Diagram</b>												
<b>Contact Resistance</b>	50m ohm Max.														
<b>Insulation Resistance</b>	DC 500V 100M ohm Min.		Switch off, red LED lighten 												
<b>Dielectric Strength</b>	AC 1500V 1 minute														
<b>Operation Temperature</b>	-25°C~85°C.														
<b>Switch Function</b>	4P DPST ON-OFF Lamp Dependent	<table border="1"> <tr> <th>Thickness</th> <th>X</th> <th>Y</th> </tr> <tr> <td>0.75...1.25</td> <td>30.2-0.1</td> <td>22.2+0.1</td> </tr> <tr> <td>1.25...2</td> <td>30.4-0.1</td> <td>22.2+0.1</td> </tr> <tr> <td>2...4</td> <td>30.8-0.1</td> <td>22.2+0.1</td> </tr> </table>	Thickness	X	Y	0.75...1.25	30.2-0.1	22.2+0.1	1.25...2	30.4-0.1	22.2+0.1	2...4	30.8-0.1	22.2+0.1	Switch on, green LED lighten 
Thickness	X	Y													
0.75...1.25	30.2-0.1	22.2+0.1													
1.25...2	30.4-0.1	22.2+0.1													
2...4	30.8-0.1	22.2+0.1													
<b>Lamp Type</b>	LED 125VAC 110V w/resistor														



**\*MATERIAL:**  
 Frame: Black, Nylon 66 (94-V2)  
 Actuator: Clear, PC (94-V2)  
 Terminals: Silver plated, Copper alloy  
 Waterproof Rubber: Silicone  
 Tolerance: ±0.3mm unless otherwise specified  
**\*Waterproof: IP-65**

RoHS Compliant

3 Removed 20A 125V ac 1/3HP and added 10(8)A 125Vac. Updated views. 1/20/15.

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: 9/19/08	Rev. 3	Unit: mm	Checked By: <i>G. GULD</i>
Title: <b>ROCKER SWITCH</b>		CW P/N: <b>GRB285A8L101GR4</b>	